





REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE


Technical characteristics:
 Specifications
 DIN EN 60 664
 DIN EN 61 984

Inserts

- 01. Number of contacts : 2
- 02. Rated Current : 70A
- 03. Rated Voltage : 1000V
- 04. Pollution degree : 3
- 05. Rated impulse voltage : 8kV¹⁰
- 06. Insulation resistance : $\geq 10^9\Omega$
- 07. Material : Polycarbonate
- 08. Rated voltage acc. to UL : 600V
- 09. Limiting temperatures : -40°C~+125°C
- 10. Flammability acc. to UL94 : V0
- 11. Mechanical working life (mating cycles) : ≥ 500

- Contacts
- 01. Material: Copper alloy
 - 02. Surface: hard-silver plated
 - 03. Contact resistance : 0.5m Ω
 - 04. Terminal : Axial screw terminal
 - 05. Wire gauge : 14-22mm²
 - 06. Hexagonal driver: SW2.5
 - 07. Stripping length : 11mm
 - 08. Tightening torque : 2-4Nm
 - 09. Rohs Compliance

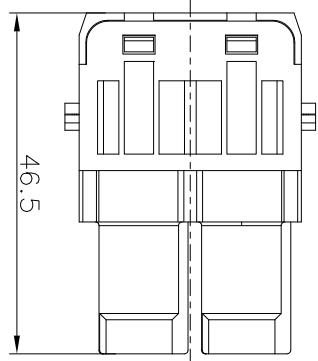

DETACHED LISTS			
PART NO.:	/	 NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD:		NAME: DMK7-002-F(14-22mm ²)	
CHKD:		TITLE: CUSTOMER DRAWING	
DRFT: ydqg	2016.08.22	DRAWING NO.:	REV
			DO-1
			SHEET
			1/1
		DO NOT SCALE DRAWING	SCALE



A 8 7 6 5 4 3 2 1