

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications  
 DIN EN 60 664-1  
 DIN EN 61 984





Inserts


- 01. Number of contacts : 8
- 02. Rated Current : 16A
- 03. Rated Voltage : 400V
- 04. Pollution degree : 3
- 05. Rated impulse voltage : 6kV<sup>10</sup>
- 06. Insulation resistance :  $\geq 10^9\Omega$
- 07. Material : Polycarbonate
- 08. Rated voltage acc. to UL : 600V
- 09. Limiting temperatures : -40°C~+125°C
- 10. Flammability acc. to UL94 : V0
- 11. Mechanical working life (mating cycles) :  $\geq 500$

Contacts

- 01. Material : Copper alloy
- 02. Surface : hard-silver plated
- 03. Contact resistance :  $\leq 1m\Omega$
- 04. Terminal : Crimp terminal
- 05. Wire gauge : 0.14-4mm<sup>2</sup> (AWG 26-12)
- 06. Rohs Compliance

Note: Crimp contact pins should order separately

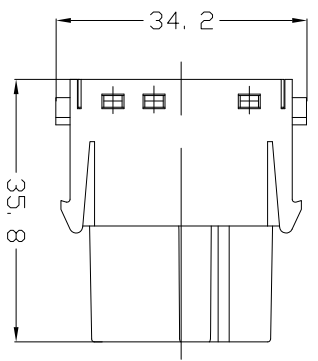

DETACHED LISTS			
PART NO.:	/	 NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
NAME:	DMEE-008-FC		
APPD:			
CHKD:			
DRFT:	YANG	2016.08.22	
TITLE:	CUSTOMER DRAWING	REV	DO-1
DRAWING NO.:	DMEE-008-FC-E01	SHEET	1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE

A 8 7 6 5 4 3 2 1