

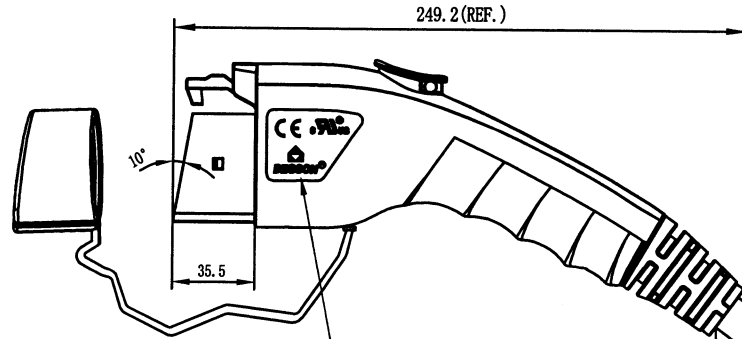


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
00-2		Drawings to upgrade	LLL	2020.09.07

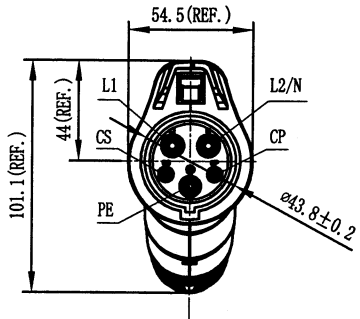


Cable: UL62 EV 3*12AWG+1*18AWG Black



Wiring diagram

- L1 12AWG Brown
- N 12AWG Blue
- PE 12AWG Yellow/Green
- CS
- CP 18AWG Red




Laser Printing Front Note:



Laser Printing Back Note (Arial):

MAAC-S-016A-V-03-5.0M-10AH
 16A 240V AC
 SAE J1772:2017
 Type 3S
 20XXXXXX-XXXX

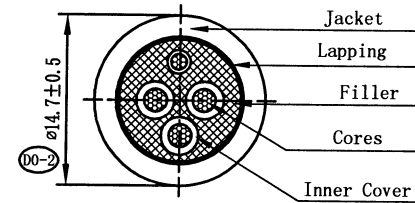

SEC A-A

NOTES:

1. Cable: UL62 EV 3*12AWG+1*18AWG Black
2. RoHS Compliance

Technical parameters

Rated voltage	240V AC
Rated current	16A
Temperature range	-30°C~+50°C
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE 2500V AC 1Min L AND N 2500V AC 1Min
Ingress protection	Type 3S
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<75N
Reference standard	SAEJ1772:2017

00-2
00-2
00-2

Customer Drawing

Size Measure Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	.XX	.X
	±0.5°	±1.0°

PART NO.:	
APPD:	ZX 20200907
CHKD:	DT 2020.9.7
DRPT:	XF LUO 2019-05-29

NINGBO DEGSON ELECTRICAL CO., LTD	
NAME: Vehicle Connector (16A AC single phase) MAAC-S-016A-V-03-5.0M-10A(H)	
TITLE: Customer Drawing	REV: D0-2
DRAWING NO.:	SHEET: 1/1
DO NOT SCALE DRAWING	SCALE: 1:3



THIRD ANGLE PROJECTION