
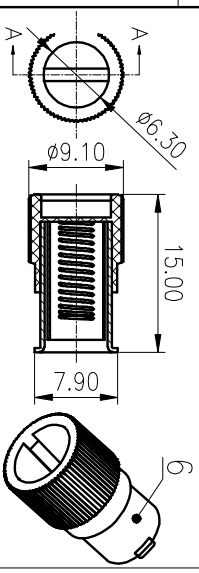
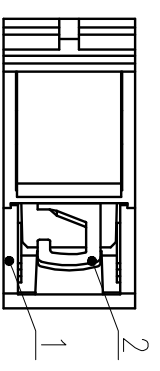

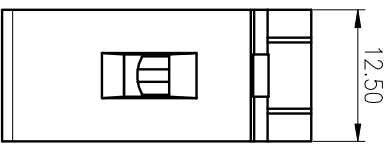
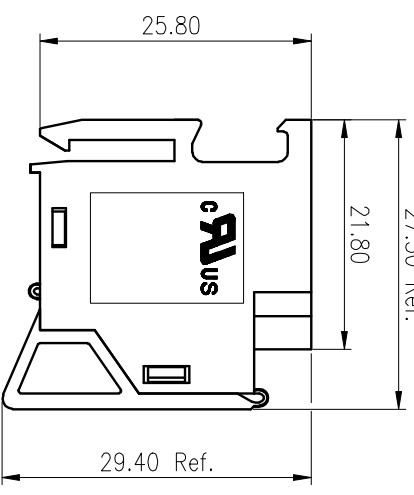



公差等级/General	Tolerances(mm)										0.1/1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	±Z
~	~	~	~	~	~	~	~	~	~	~	~	~	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

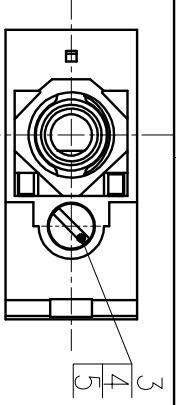

Note: the fuse holder does not fit into the body, and the finished product is shipped in the same inner box.

REV	ECN	DESCRIPTION	DRAFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	DRAWING NO.: TSCF4-C01	
APPD:	/	NAME: TSCF4-01P-15-01A(H)	
CHKD:	/	DRAFT: CenWZ 2020.05.19	
		TYPE: CUSTOMER DRAWING	
		SCALE: 1.5:1	SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
5	Fuse holder	Copper alloy	/
5	Cage	M3.5/Ni Plated	/
4	Current carrier	Copper	/
3	Screw	Steel	M3.5/Zn Plated
2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电压 /Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准 /IEC Standard:	/	/	/
过压类别 /Overvoltage Category /标称等级	III/2		
额定电压/电压 /Rated Voltage(V)/Current(A)	250 /10		
工频耐压 /Withstanding voltage	AC2000V/1min		
螺栓扭矩 /Torque Tightening(N·m/Lb·in)	M3.5: 0.8/7.0		
线径范围 (硬线和软线) /Wire Range(rigid and flexible)(mm ² /AWG)	0.5~4.0/30~10		
剥线长度 /Stripping length(mm)	8		
使用温度范围 /Operating Temperature(°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		
标准颜色编号 /Standard color number: RAL	RAL 2000		