
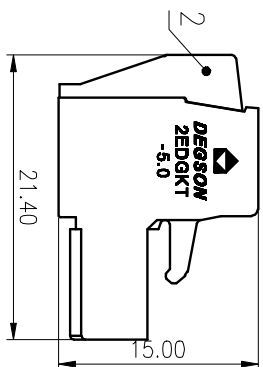
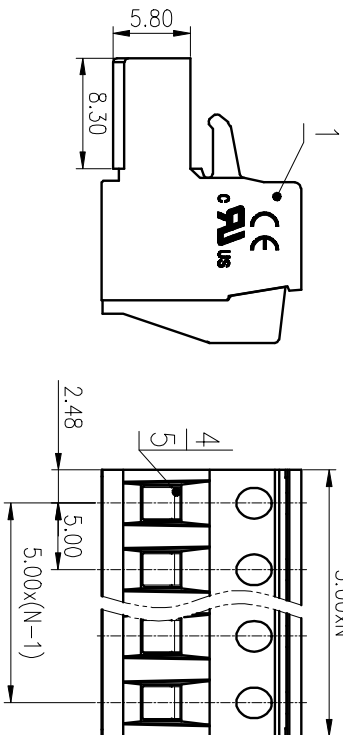


公差/General Tolerances(mm)		公差/General Tolerances(mm)										公差/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	0.1/1.0
3	6	10	18	30	50	80	120	180	250	315	400	500	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

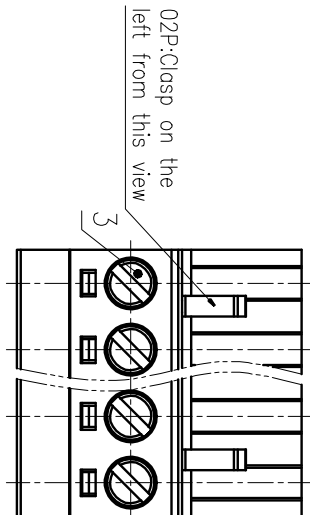

ITEM	NAME OF PART	MATERIAL	NOTES
5	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Screw	Steel	M3/Zn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/18	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等			
数/ Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	320/20	/
额定冲击电压 (KV) / Rated Impulse Voltage(KV)	/	4.0	/
额定扭矩/Torque Tightening(N·m/Lbin)	M3: 0.59/5.21		
导线范围 (硬导线/软线) / Wire Range(rigid and flexible)(mm <sup>2</sup> / AWG)	1.0~2.5/30~12		
间距/Pitch(mm) / 间距范围/Poles	5.00/N=02~24P		
剥线长度/Stripping length(mm)	7-8		
操作温度范围/Operating temperature(°C)	-40~+105		
符合RoHS/符合RoHS/Conform to RoHS	Yes		

MATERIAL: SURFACE: Yes

MAT NO.: /  
 STATUS: /  
 APPD: LonCHH 2020.02.29  
 CHKD: GongYZh 2020.02.29  
 DRFT: CZ 2018.04.02

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**  
**2EDGKT-5.0-XPP-1Y-1000A(H)**  
 DRAWING NO.: 2EDGKT-5.0-C01  
 TYPE: CUSTOMER DRAWING

SCALE: 2:1 SHEET 1/1