

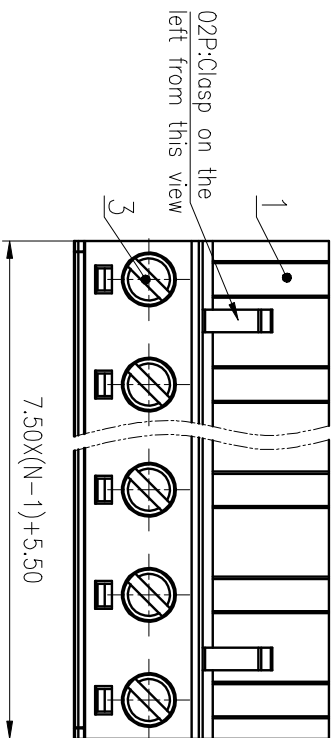



公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z



02P:Clasp on the left from this view

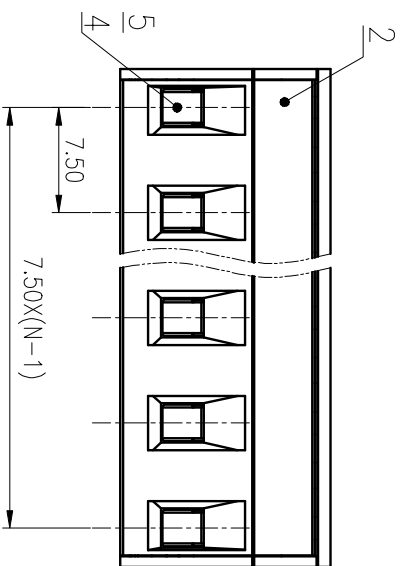

5	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Screw	Steel	M3/zn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 /IEC Standard:			
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category/污秽等级 /Pollution Degree	III/2		
额定电压/电涌/Rated Voltage(V)/Current(A)	400/20		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4		
额定转矩/Torque Tightening(N.m/Lb.in)	M3 0.5/4.43		
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/28~12		
间距/Pitch(mm)/导线范围/Poles	7.5/N=02~16P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		

MATERIAL:

SURFACE:

MAT NO.:

DEGSON[®] NINGBO DEGSON ELECTRICAL CO.,LTD

STATUS:

NAME:

2EDGK-7.5-XXP-1Y-1000A(H)

Appd:Lon CHH2020.03.24

CHKD:Gong YZZ2020.03.24

DRAFT: ZX 12/13/16"

DRAWING NO.: 2EDGK-7.5-C08

REV ECN DESCRIPTION DRAFT DATE

SIZE: A4

mm

(inch)

TYPE: CUSTOMER DRAWING

SCALE: 2:1

SHEET 1/1

D

C

B

A

2

3

4

5

6

1

2

3

4

5

6