
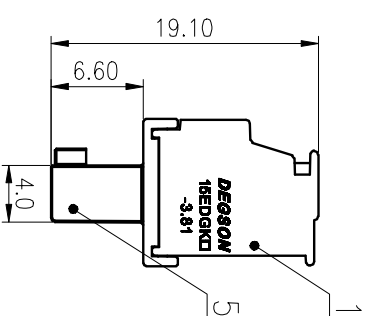


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)	
0	>3	>10	>180
3	~6	~50	~315
6	10	80	~400
10	18	120	~500
±0.12	±0.18	±0.26	±0.31
±0.31	±0.37	±0.57	±0.80
±0.93	±1.05	±1.15	±1.60
±2.20	±2.50		
±Z			

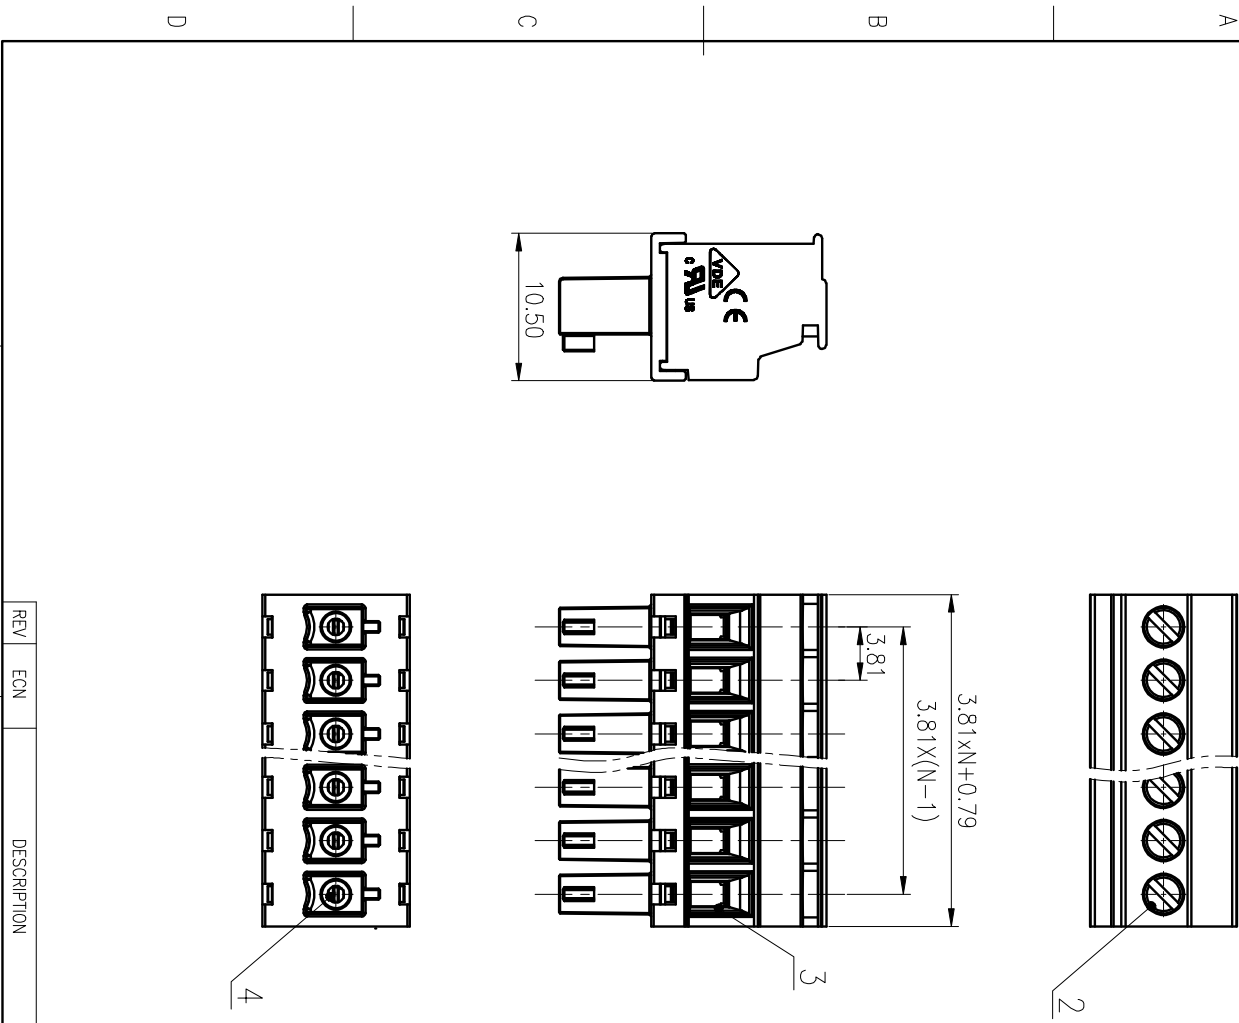

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Screw	Steel	M2/Zn Plated
3	Cage	Copper Alloy	M2/Ni Plated
4	Clamp	Copper Alloy	Sn Plated
5	Cover	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	300/8	
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2			
额定电压/电涌/Rated Voltage(V)/Current(A)	250/7			
额定冲击电压(kV)/Rate Impulse Voltage(kV)	2.5			
紧固扭矩/Torque Tightening(N·m/Lb·in)	M2, 0.2/1.77			
绞合范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.5~1.5/28~16			
间距/Pitch(mm)/线数范围/Poles	3.81/N=02~24P			
剥线长度/Stripping length(mm)	6~7			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS要求/Conform to RoHS	Yes			

MATERIAL: SURFACE:

MAT NO.: /

STATUS: /

APPD: Lan CHH 2020.05.29

CHKD: Yu JZh 2020.05.29

DRT: CenK 2020.05.29

NAME: **15EDGKA-3.81-XXP-1Y-100A(H)**

DRAWING NO.: 10002030

TYPE: CUSTOMER DRAWING

SCALE: 2:1

REV T0

1/1

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

宁波高松电子有限公司

REV	ECN	DESCRIPTION	DRT	DATE