
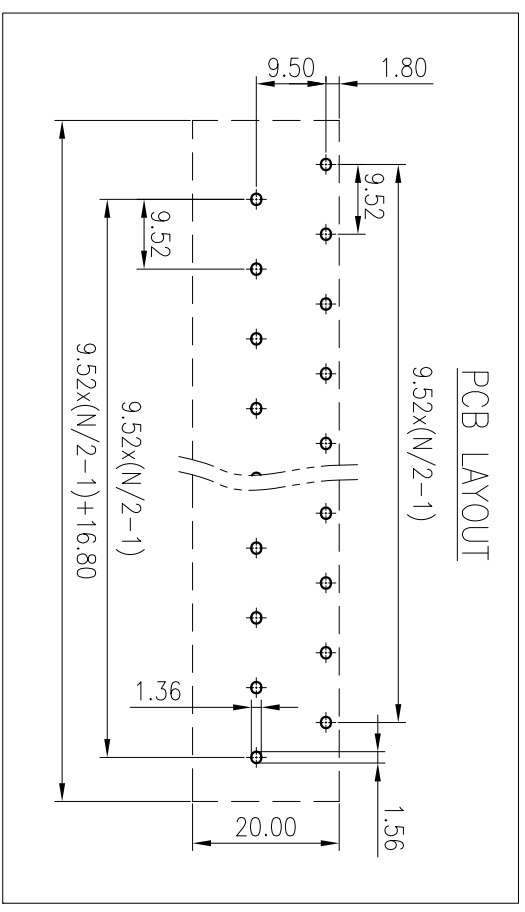
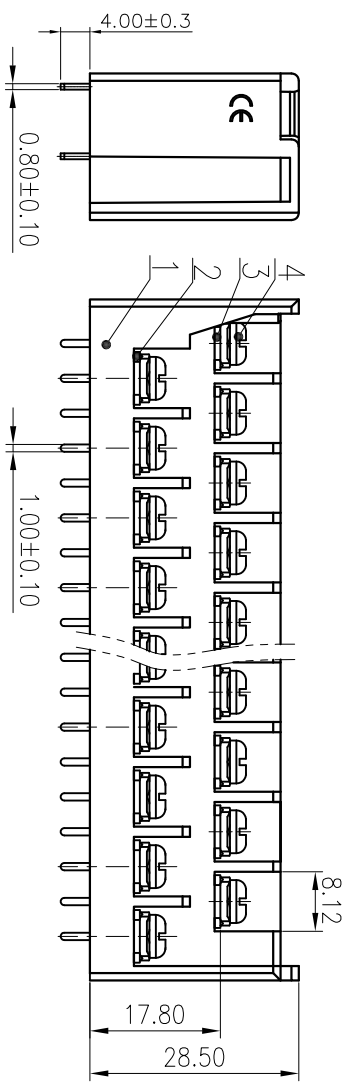


Pitch Range In mm	Nominal Dimension Range In mm					- 0.1/10 /
	Over 6	Over 10	Over 30	Over 60	Over 100	
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	≤
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	
					±1.00	±1.30
						±2

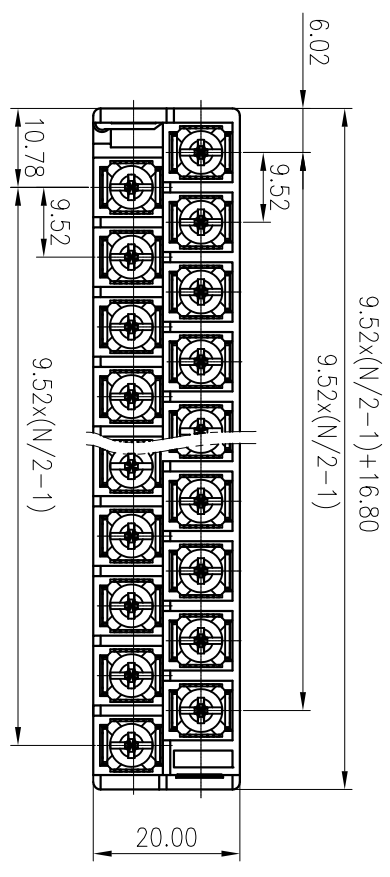

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	Zn Plated
3	Pin header 2	Copper alloy	Sn Plated
2	Pin header 1	Copper alloy	Sn Plated
1	Housing	PBT	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	300/10
拧紧扭矩/Torque Tightening(N·m/Lb·in)	M3.5, 1.4	12.40	
线径范围(导线)/Wire Range(flexible)(AWG)	18~12		
间距/Pitch(mm)/线数范围/Poles	9.52/N=4~20P		
使用温度范围/Operating temperature(°C)	-40~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /  
SURFACE: /

NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG44-1-XXP-1Y-00A(H)

DRAWING NO.: DG44-1-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

REV	ECN	DESCRIPTION	DRAFT	DATE