
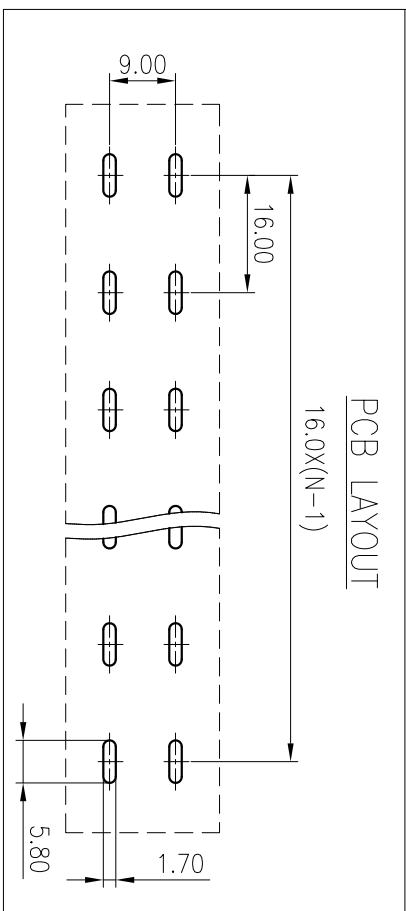
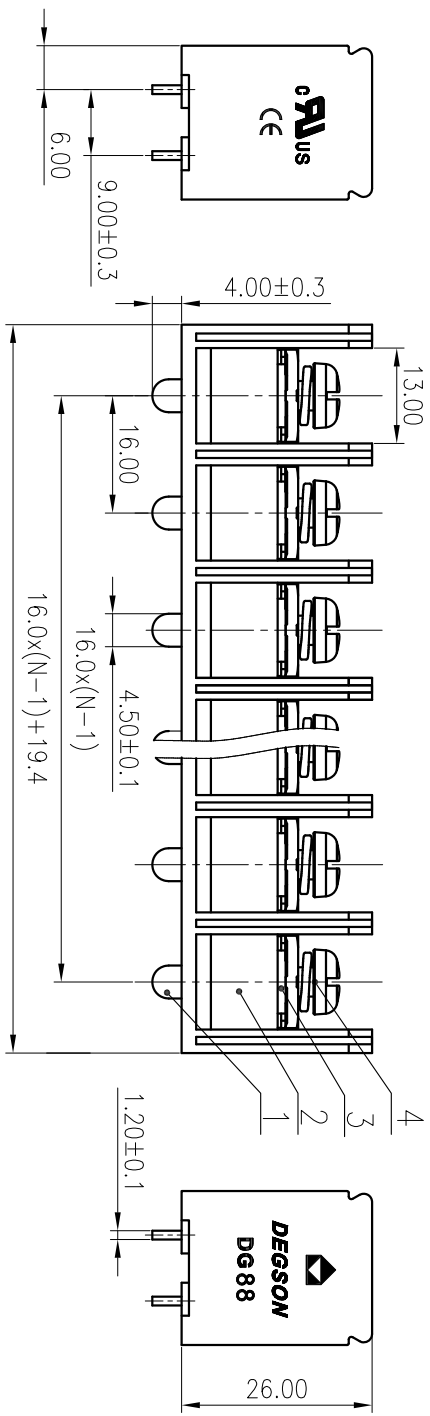


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>18
~3	~6	~10	~30
~6	~10	~18	~50
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/1.0	0.1/1.0	0.1/1.0	0.1/1.0
±2	±2	±2	±2

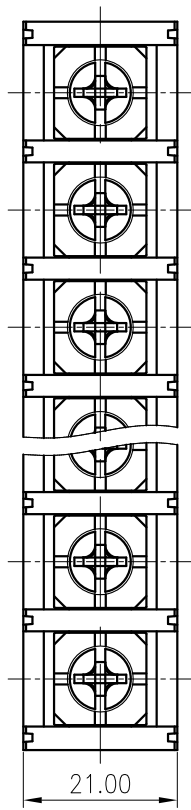

MATERIAL:	SURFACE: /		
MAT NO.:	/		
STATUS:	/		
APPD:	NAME: DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD		
CHKD:	DRAWING NO.: DG88-C01		
DRFT: XHY 2013.12.12	TYPE: CUSTOMER DRAWING		SCALE: 1:1
REV	ECN	DESCRIPTION	DRFT DATE
1	2	3	4
1/1	1/1	1/1	1/1

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screws	Steel	M5/Ni Plated
3	Nut	Steel	M5/Ni Plated
2	Housing	PA66	UL94V-0
1	Solder Pin	Copper	Sn Plated

UL 标准/UL Standard: B C D

额定电压/电流/Rated Voltage(V)/Current(A) 600/100600/100 600/5

IEC 标准/IEC Standard: 级/ Pollution Degree III/3 III/2 II/2

过压类别/Overvoltage Category/污染等 III/3 III/2 II/2

额定电压/电流/Rated Voltage(V)/Current(A) 800/101 1000/101 1000/101

额定脉冲电压/(KV)/Rate Impulse Voltage(KV) 10 10 10

额定扭矩/Torque Tightening(N·m/Lb·in) M5, 2.42/22

线径范围/(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG) 2.5~25/14~3

可焊/ Pitch(mm)/线数范围/Poles 16/N=02~20P

剥线长度/Stripping length(mm) 13~14

使用温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes