
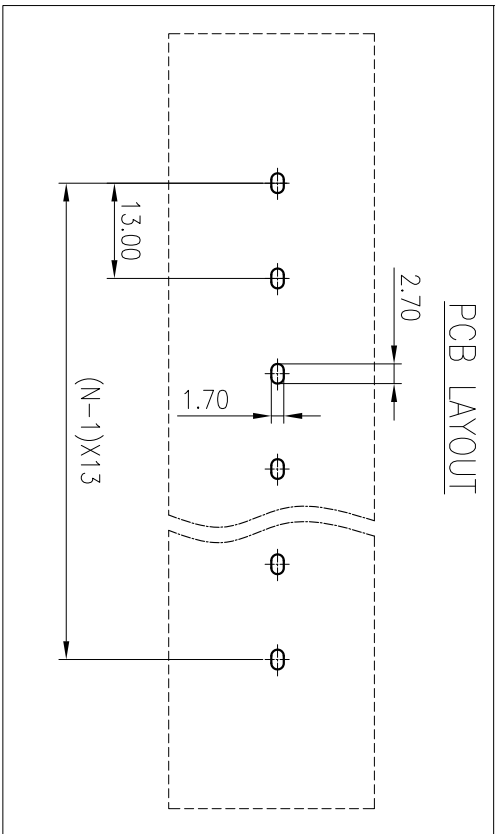


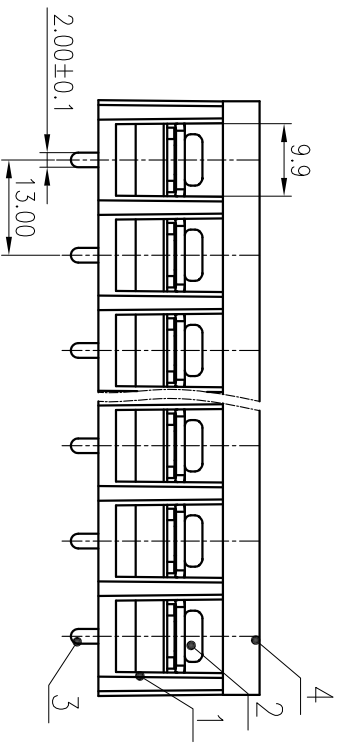



Without Cover

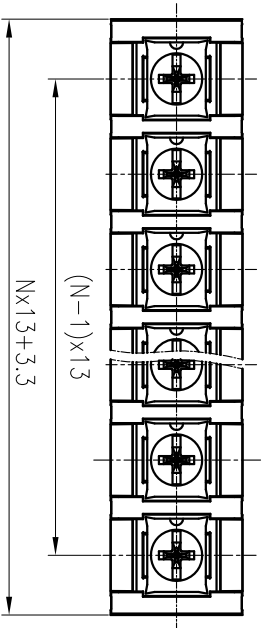

公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>18
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
±2	±2	±2	±2

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cover	PC	UL94V-2
3	Pin header	Copper alloy	M4/Sn plated
2	Screw	Steel	M4/Ni plated
1	Housing	PA66	UL94V-0

UL Standard:	B	C	D
额定电压/Rated Voltage(V)	600/40	600/40	600/5
额定电流/Rated Current(A)	4	4	5

IEC Standard:	III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	1000/41	1000/41	1000/41
额定脉冲电压/(KV)/Rate Impulse Voltage(KV)	8	8	8
额定扭矩/Torque Tightening(N·m)/lb·in)	M4, 1.16/10.5		
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.75~6/18~10		
间距/Pitch(mm)/导线范围/Poles	13/N=02~20P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:		NAME:	DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD:			
DRAFT:	XieXD 2020.06.15	DRAWING NO.:	DG78C-C02
		TYPE:	CUSTOMER DRAWING
		SCALE:	1:1
		REV	T0
		SHEET	1/1

REV	ECN	DESCRIPTION	DRAFT	DATE