
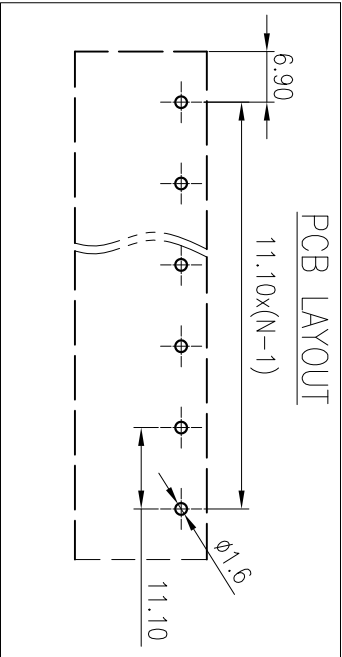

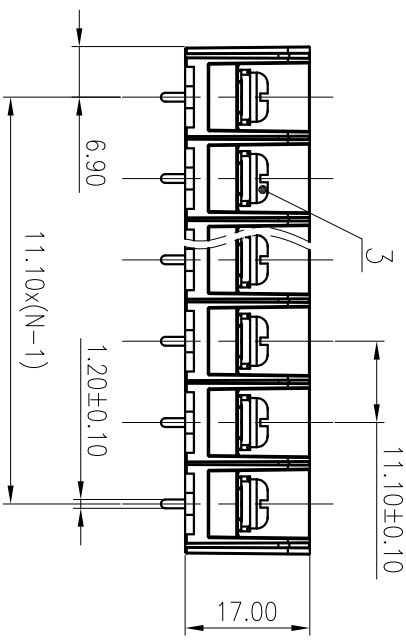



公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>18	>50
~	~	~	~
3	~	~	~
6	~	~	~
10	~	~	~
18	~	~	~
30	~	~	~
50	~	~	~
80	~	~	~
120	~	~	~
180	~	~	~
250	~	~	~
315	~	~	~
400	~	~	~
500	~	~	~
>500	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/1.0	0.1/1.0	0.1/1.0	0.1/1.0
±2	±2	±2	±2

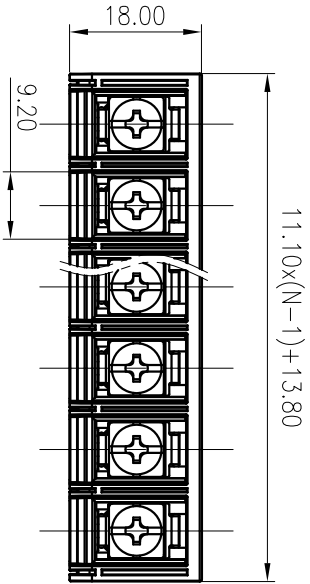

3	Screw	Steel	M4/Ni Plated
2	Pin header	Copper alloy	M4/Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 600/30 600/30 600/5			
IEC 标准/IEC Standard: 过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
级/ Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A) / / /			
额定脉冲电压/(KV)/Rate Impulse Voltage(KV) / / /			
螺丝扭矩/Torque Tightening(N·m/Lb·in) M4, 1.2/10.53			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG) 22~10			
间距/Pitch(mm)/线数范围/Poles 11.0/N=02~5P			
剥线长度/Stripping length(mm) 7~8			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS要求/Conform to RoHS Yes			

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: CenMZ 2020.05.28

DRAWING NO.: DG66S-2-B-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV	ECN	DESCRIPTION	DRAFT	DATE

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD
NAME: DG66S-2-B-XXP-1Y-00A(H)