# PCB LAYOUT

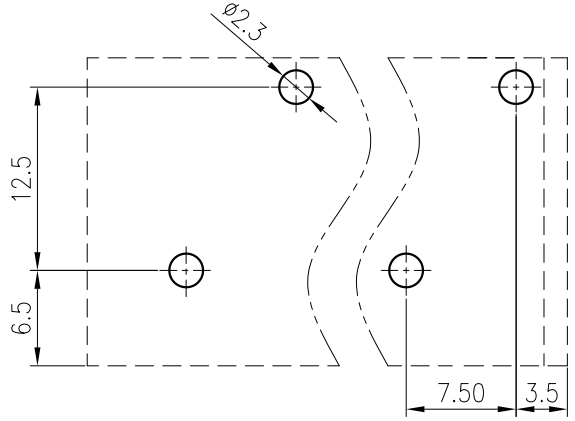


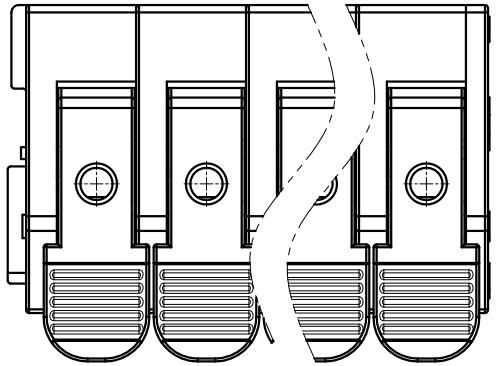

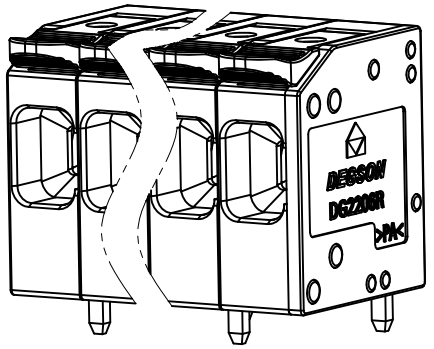


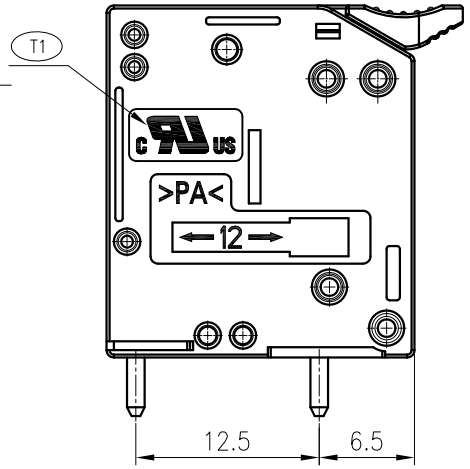


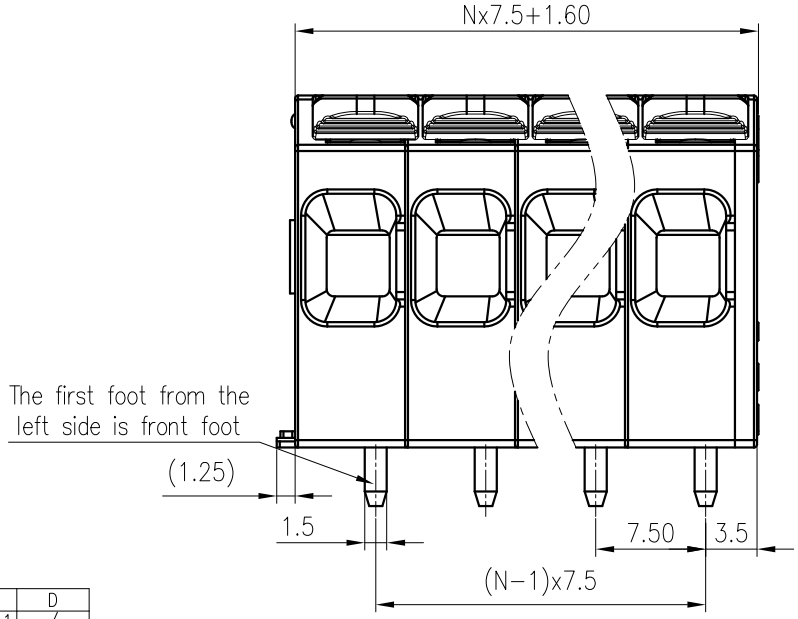


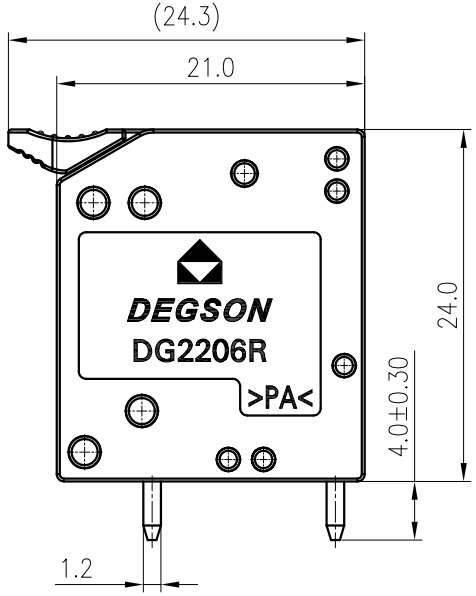


未注公差/General tolerances(mm)

| 0 ~ 3 | >3 ~ 6 | >6 ~ 10 | >10 ~ 18 | >18 ~ 30 | >30 ~ 50 | >50 ~ 80 | >80 ~ 120 | >120 ~ 180 | >180 ~ 250 | >250 ~ 315 | >315 ~ 400 | >400 ~ 500 | >500 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ±0.12 | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 |

0.1/10 ; ±2°

| UL 标准/UL Standard: | B | C | D |
|---|---|---|---|
| 额定电压/电流/Rated Voltage(V)/Current(A) | 600/41 | 600/41 | / |
| EC 标准/IEC Standard: | | | |
| 过压类别/Overvoltage Category/污染等级/Pollution Degree | III/3 | III/2 | II/2 |
| 额定电压/电流/Rated Voltage(V)/Current(A) | 800/41 | 1000/41 | 1000/41 |
| 额定脉冲电压(KV)/Rate Impulse Voltage(KV) | 8 | 8 | 8 |
| 线径范围(硬线和软线)/Wire Range(rigid and flexible)($mm^2$/AWG) | 24~8/0.2~6,10(sol) | | |
| 间距/Pitch(mm)/线数范围/Poles | 7.5/N=02~12P | | |
| 剥线长度/Stripping length(mm) | 11-13 | | |
| 使用温度范围/Operating temperature(°C) | -40~+105 | | |
| 符合RoHS环保要求/Conform to RoHS | Yes | | |

| REV | ECN | DESCRIPTION | DRFT | DATE |
|---|---|---|---|---|
| T1 | 20210085 | 1xAdd the UL lettering | Chen Zh | 2021.05.10 |

MATERIAL: / SURFACE: /

MAT NO.:

STATUS: /

APPD: Lan ChH 2021.05.10

CHKD: Yu JZh 2021.05.10

DRFT: Liu ZhH 2020.01.02

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG2206R-7.5-DA-XXP-1Y-00A(H)

DRAWING NO.: 10001087 REV T1

SIZE: A4 mm (inch) TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。