
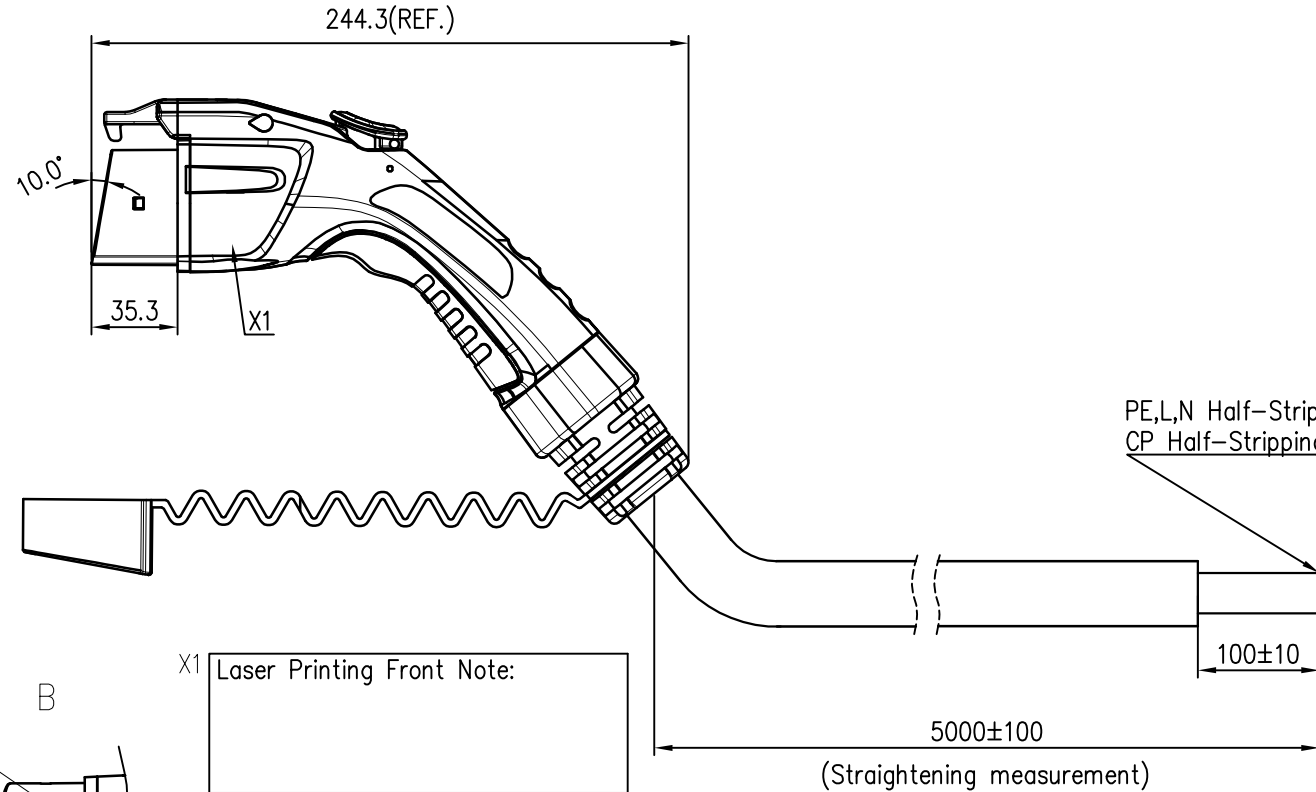




Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非授予明確授權，否則禁止轉讓、複製、利用、交還本文件的內容。未經本廠書面授權，嚴禁私自對外或專利局所有權利。

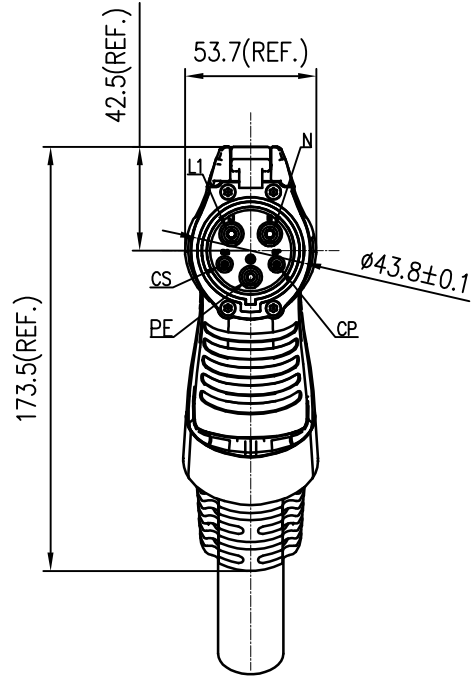

PE,L,N Half-Stripping 10mm,  
CP Half-Stripping 8mm



Wiring diagram

- L1 5AWG Red
- N 5AWG Black
- PE 6AWG Yellow/Green
- CS
- CP 16AWG Orange

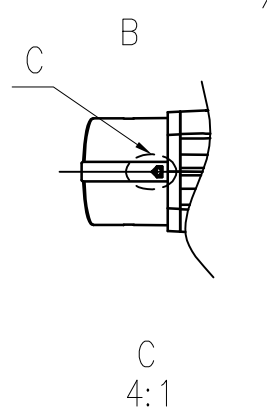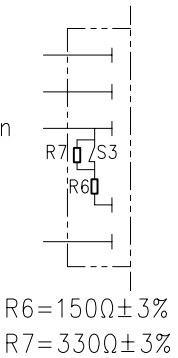

X1 Laser Printing Front Note:

Laser Printing Back Note(Arial):  
**MAAC-S-080A-V1-03-5.0M-10A(H)**  
 80A 250V AC  
 SAE J1772:2017  
 IP67  
 20xxxxxx-xxxx

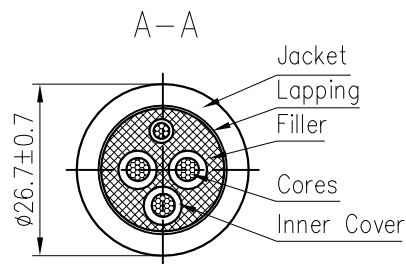

额定电压/Rated Voltage/Current	250V AC/80A
绝缘电阻/Insulate Resistance	>500MΩ,500V DC 1min
耐压/Withstanding Voltage	L, N and PE ,2500V AC 1min L and N ,2500V AC 1min
防护等级/Ingress Protection	IP67
插拔寿命/Insertion/Pullout Times	10,000 Times
插拔力/Insertion/Pullout Force	<75N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	2*5AWG+1*6AWG+1*16AWG Black
标准/Reference standard	SAE J1772:2017
符合RoHS环保要求/Conform to RoHS	Yes

MATERIAL: /	SURFACE: /	
MAT NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /		
APPD:	NAME: MAAC-S-080A-V1-03-5.0M-10A(H)	
CHKD:	DRAWING NO.: /	
DRFT Rong QX 2022.08.22	REV DO-1	
SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1: 3 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------